




iX VEND for hot drinks machines

The iX VEND has a 5-stage filtration process designed to provide high quality water, improving taste, colour and odour whilst inhibiting scale for high volume hot beverage and vending applications.

SCALE INHIBITION. The filter consists of carbon granules and polyphosphate which reduces sediment and chlorine whilst protecting against bacteria and water borne cysts. iX VEND's in-built scale inhibition dramatically reduces scale build up and saves energy. The simple installation and quick replacement make the iX VEND the ideal choice for caterers and vending operators requiring high volume, safe water treatment whilst making considerable cost savings.

BIG SAVINGS FOR VENDING OPERATORS. National and regional vending operators can make huge savings with iX Water. By changing the media insert rather than the entire filter, costs are reduced - thus annual saving can reach into thousands of pounds for operators with a machine park of just 50 machines.

iX Head sold separately. [Click here](#) to view the spec sheet.

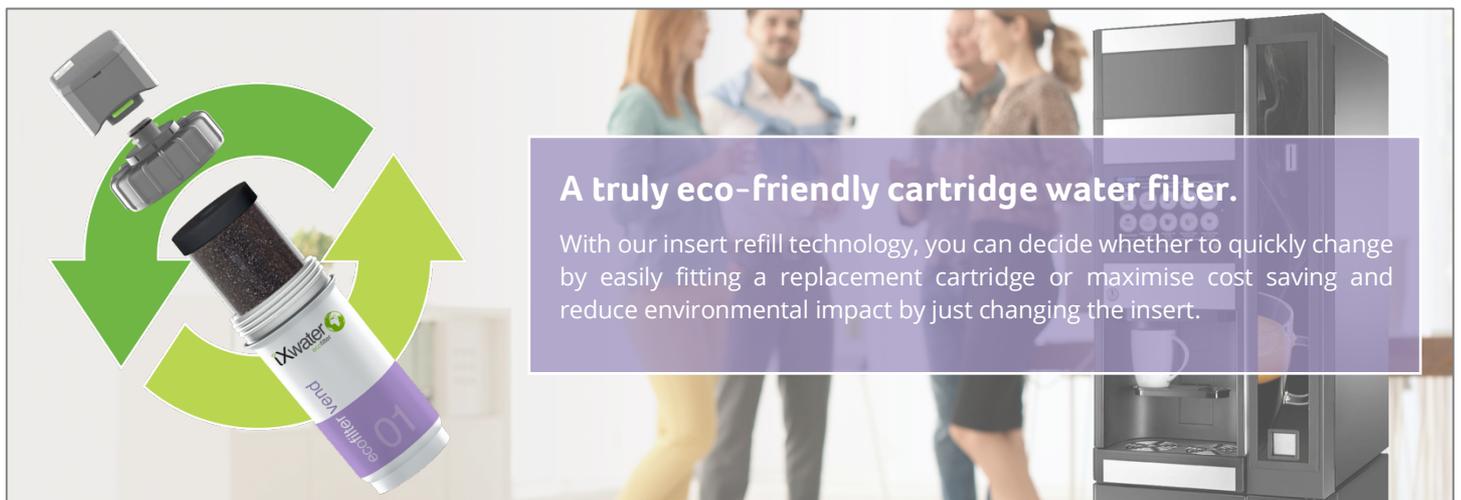

A truly eco-friendly cartridge water filter.

With our insert refill technology, you can decide whether to quickly change by easily fitting a replacement cartridge or maximise cost saving and reduce environmental impact by just changing the insert.


Features & Benefits

- Comes in two sizes, 01 and 02.
- Reduces sediment, and chlorine taste and odour
- NSF Certified components & certified media
- Made in Britain
- Simple installation
- Filter housing is re-usable, and filters are easy and economical to replace.
- No waste - replace & return the insert refill.
- Suitable for most free-standing and table-top coffee & vending applications



The bypass on the iX Head when attached to the iX Vend filter, must be set to 0 to ensure no hard water is dialled back into the water supply.

CONTINUED OVERLEAF

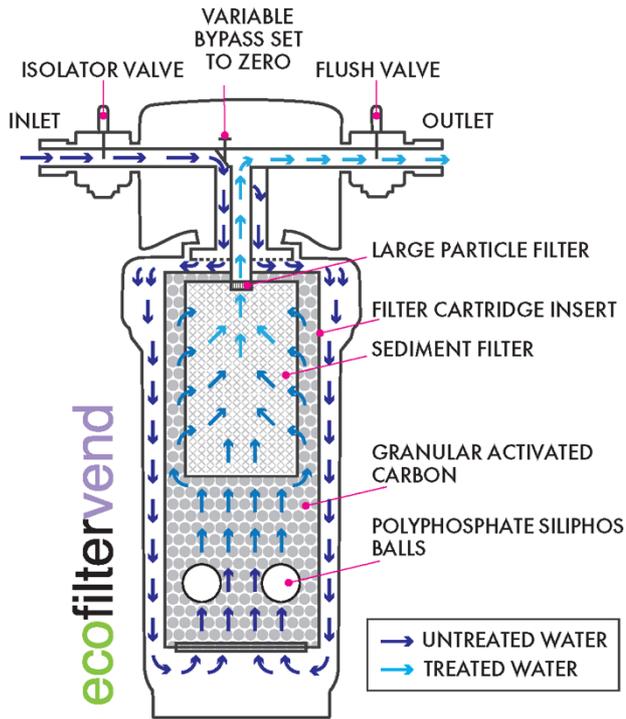

iX Vend Specifications

Flow Rate (LPM)	7
Min Pressure	1.5 bar
Max Pressure	6 bar
Max Temperature (°c)	35
Connections	3/8" PF or 3/8" BSP
Operation Position	Vertical

This illustration serves as explanation of the filter technology. It is not to scale.


For more information visit:
www.watercare.co.uk/ecofiltervend

Part Descriptions & Codes

Description	Dims H x W mm	Capacity (Ltrs)	Code
iX01 Vend Assembled Cartridge and Resin Refill (Without Head)	305 x 134	26,733	IX01VENDCART-V2
iX02 Vend Assembled Cartridge and Resin Refill (Without Head)	475 x 134	53,466	IX02VENDCART-V2

Description	Dims H x W mm	Capacity (Ltrs)	Code
iX01 Vend Refill and Spanner	234 x 94	26,733	IX01VENDREFILL-V2
iX02 Vend Refill and Spanner	404 x 94	53,466	IX02VENDREFILL-V2

Capacity based on water hardness of 12° Clarke / 180 PPM – with variable bypass set to 0.

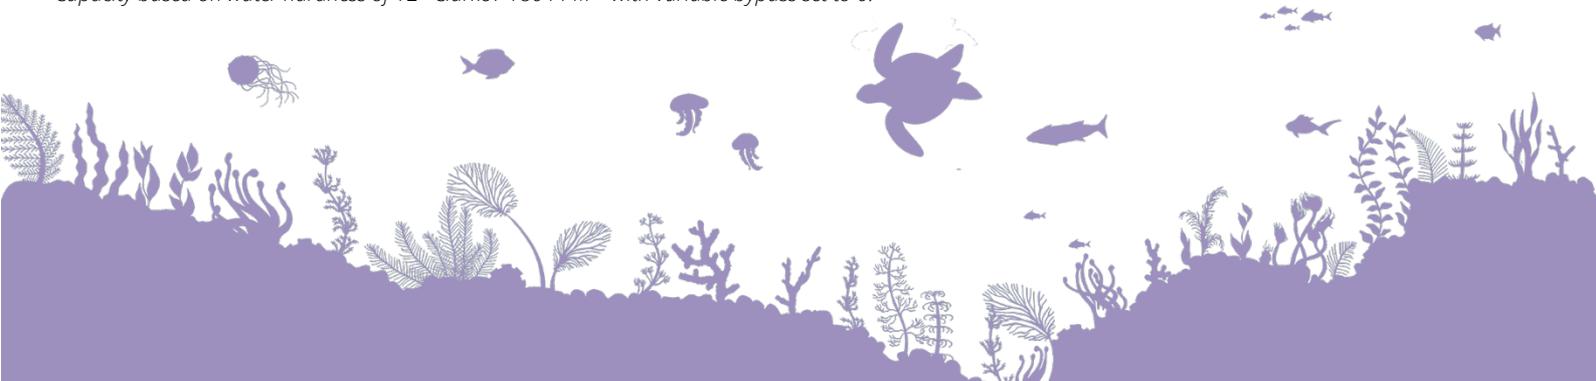

European WaterCare Ltd.

Regal House, South Road, Harlow, Essex, CM20 2BL.

Tel: 01279 780250 | Email: info@watercare.co.uk

Visit: www.watercare.co.uk | [@europeanwtrcare](https://twitter.com/europeanwtrcare)



WATERCARE